


保温阀

H 16
BZ41W-25C、P、R 保温夹套闸阀
Y 40

结构图

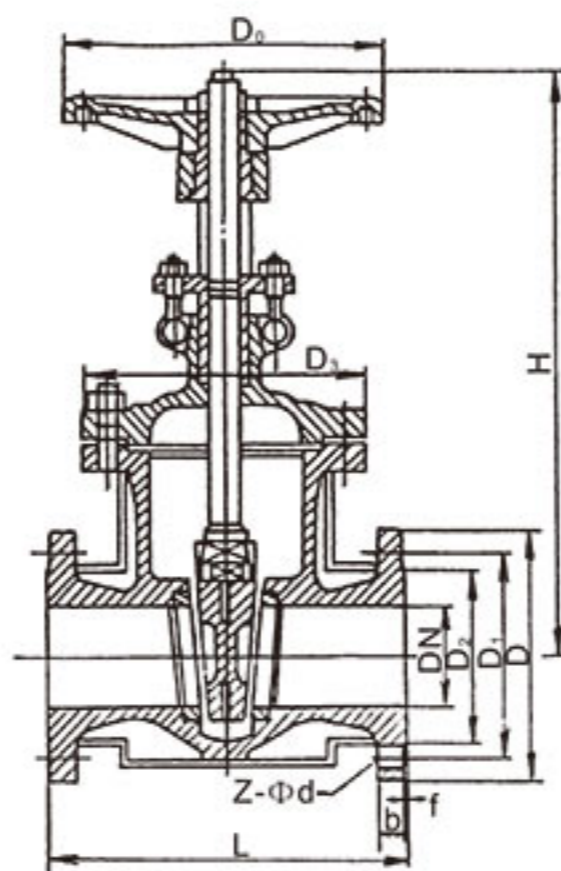

主要外形尺寸及连接尺寸

公称压力 PN/MPa	公称通径 DN/mm	尺寸/mm								
		L	D	D ₁	D ₂	b	Z-φd	H	D ₀	加热汽接头螺纹
1.6	50	250	195	160	135	20	8-φ18	358	280	M12×1.25
	80	310	245	210	185	22	8-φ18	435	320	M12×1.25
	100	350	280	240	210	24	8-φ23	502	360	M12×1.25
	150	450	335	295	265	26	12-φ23	675	400	M12×1.25
	200	550	405	355	320	30	12-φ25	820	400	M12×1.25
	250	650	460	410	375	30	12-φ25	970	500	M20×1.5
	300	750	520	470	435	34	16-φ25	1145	500	M20×1.5
	350	850	580	525	485	36	16-φ30	1280	500	M20×1.5
	400	950	640	585	545	40	20-φ30	1450	500	M20×1.5
2.5	50	250	195	160	135	22	8-φ18	358	280	M12×1.25
	80	310	270	220	188	28	8-φ18	435	320	M12×1.25
	100	350	300	250	218	30	8-φ23	502	360	M12×1.25
	150	450	360	310	278	34	12-φ23	675	400	M12×1.25
	200	550	425	370	332	36	12-φ25	820	400	M12×1.25
	250	650	485	430	390	40	12-φ25	970	500	M20×1.5
	300	750	550	490	448	44	16-φ25	1145	500	M20×1.5
	350	850	610	550	505	48	16-φ30	1280	500	M20×1.5
	400	950	660	600	555	50	20-φ30	1450	500	M20×1.5
4.0	50	250	195	160	135	22	8-φ18	371	280	M12×1.25
	80	310	270	220	188	28	8-φ18	455	320	M12×1.25
	100	350	300	250	218	30	8-φ23	550	360	M12×1.25
	150	450	375	320	282	38	12-φ23	708	400	M20×1.5
	200	550	445	385	345	42	12-φ25	890	400	M20×1.5
	250	650	510	450	408	46	12-φ25	1015	500	M24×1.5
	300	750	570	510	465	52	16-φ25	1235	500	M24×1.5
	350	850	655	585	535	58	16-φ30	1390	500	M24×1.5
	400	950	680	610	560	60	20-φ30	1560	500	M24×1.5